



US 20180198203A1

(19) **United States**

(12) **Patent Application Publication**
BADER et al.

(10) **Pub. No.: US 2018/0198203 A1**

(43) **Pub. Date: Jul. 12, 2018**

(54) **NON-INVASIVE BEAM FORMING ADD-ON MODULE**

(71) Applicant: **KING ABDULLAH UNIVERSITY OF SCIENCE AND TECHNOLOGY**, Thuwal (SA)

(72) Inventors: **Ahmed BADER**, Tla'a Al-Ali District (JO); **Mohamed-Slim ALOUINI**, Thuwal (SA)

(21) Appl. No.: **15/738,261**

(22) PCT Filed: **Aug. 11, 2016**

(86) PCT No.: **PCT/IB2016/054849**

§ 371 (c)(1),

(2) Date: **Dec. 20, 2017**

Related U.S. Application Data


(60) Provisional application No. 62/205,911, filed on Aug. 17, 2015.

Publication Classification

(51) **Int. Cl.**
H01Q 3/28 (2006.01)
H04W 16/28 (2006.01)
H04B 7/06 (2006.01)
(52) **U.S. Cl.**
CPC *H01Q 3/28* (2013.01); *H04W 84/18* (2013.01); *H04B 7/0617* (2013.01); *H04W 16/28* (2013.01)

(57) **ABSTRACT**

An embodiment of a non-invasive beamforming add-on apparatus couples to an existing antenna port and rectifies the beam azimuth in the upstream and downstream directions. The apparatus comprises input circuitry that is configured to receive one or more signals from a neighboring node of the linear wireless sensor network; first amplifier circuitry configured to adjust an amplitude of a respective received signal in accordance with a weighting coefficient and invoke a desired phase to a carrier frequency of the received signal thereby forming a first amplified signal; and second amplifier circuitry configured to adjust a gain of the first amplified signal towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network.

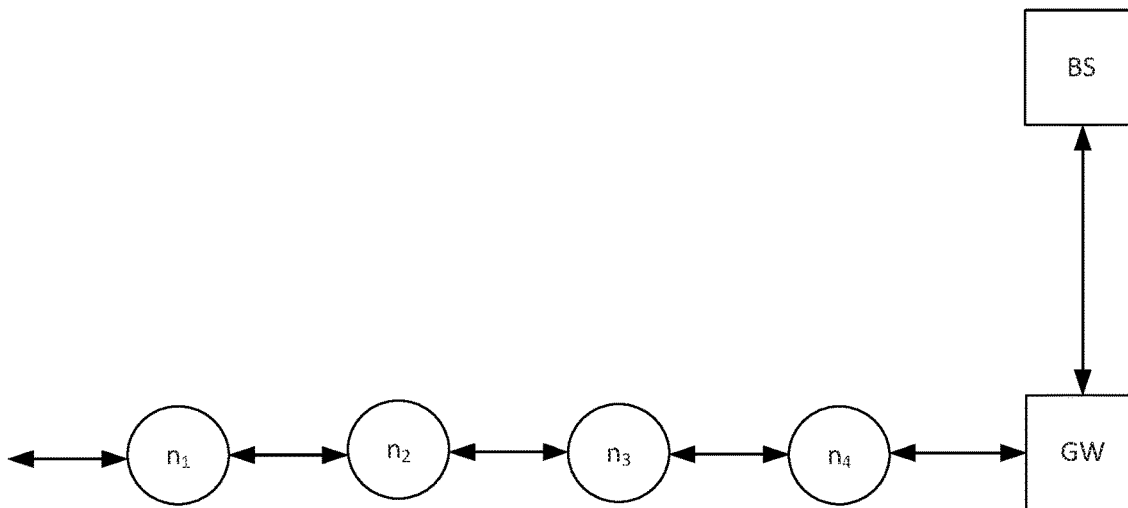

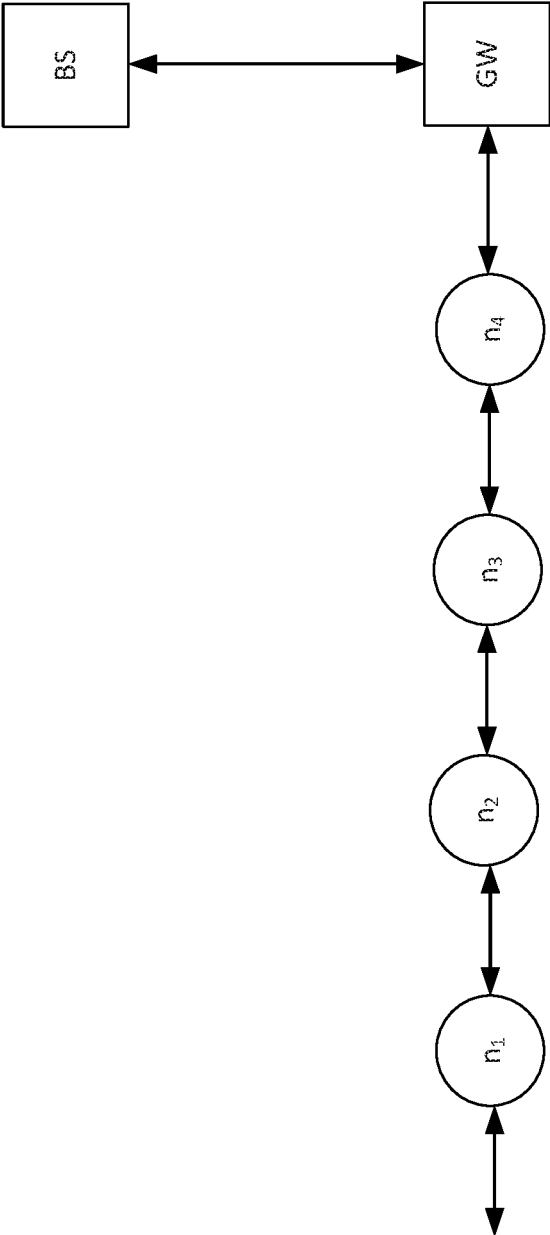


FIG. 1

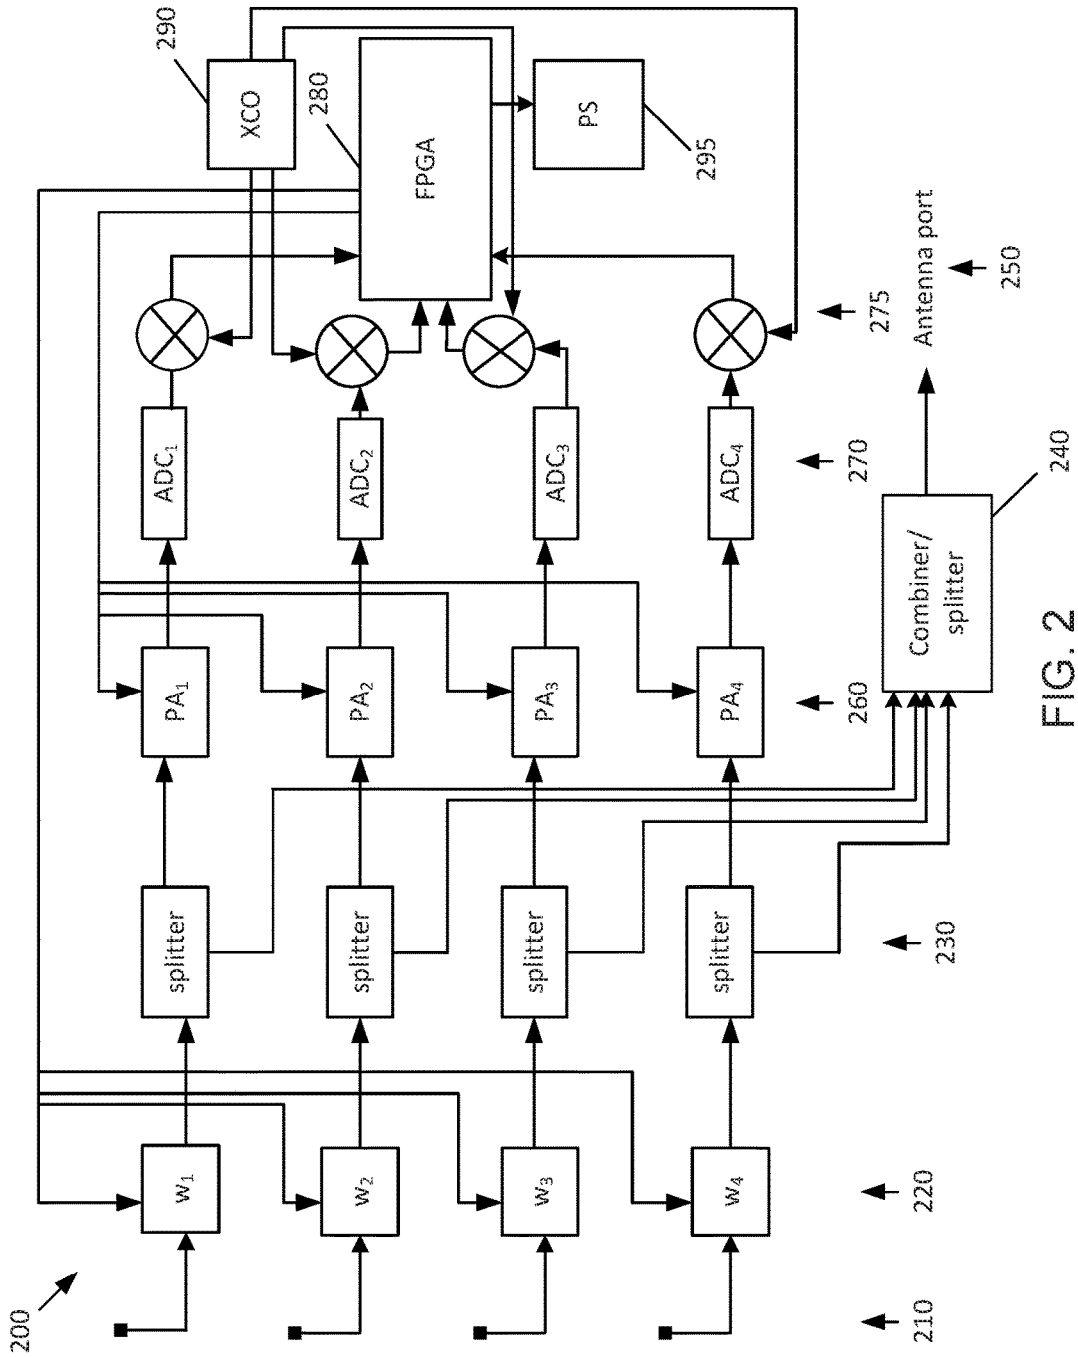


FIG. 2

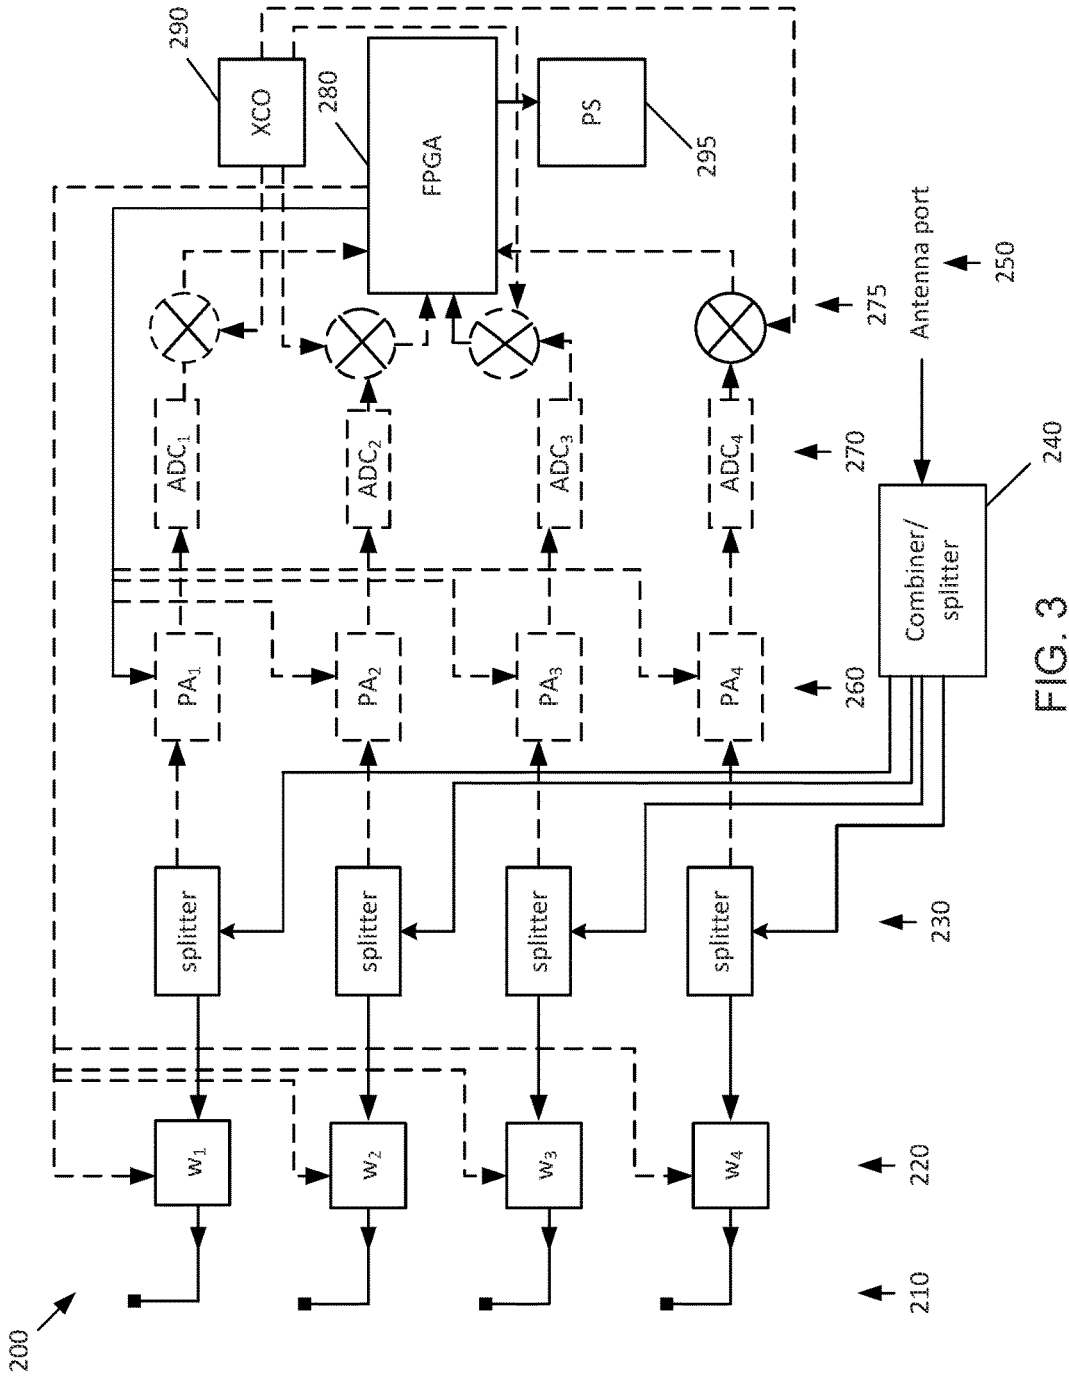


FIG. 3

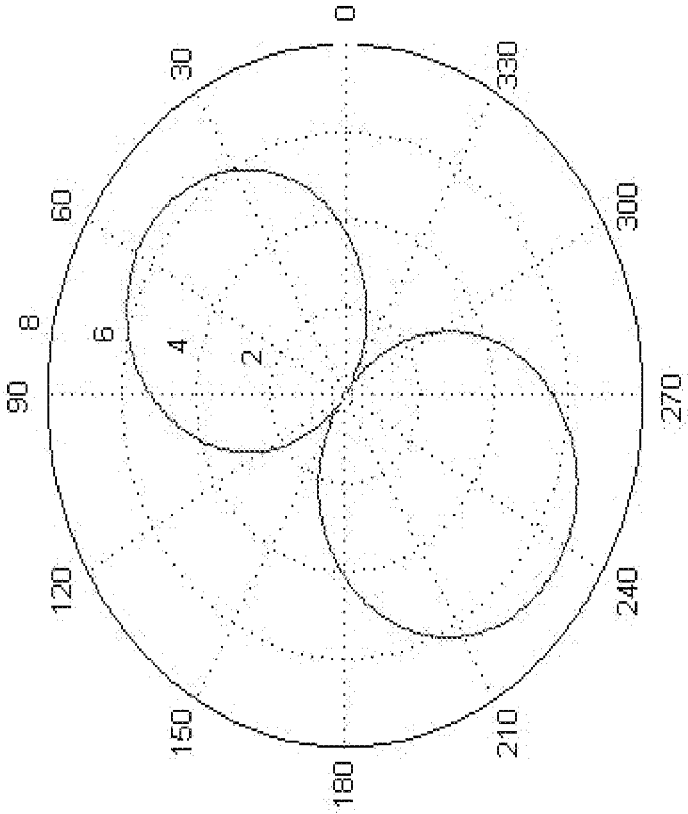


FIG. 4

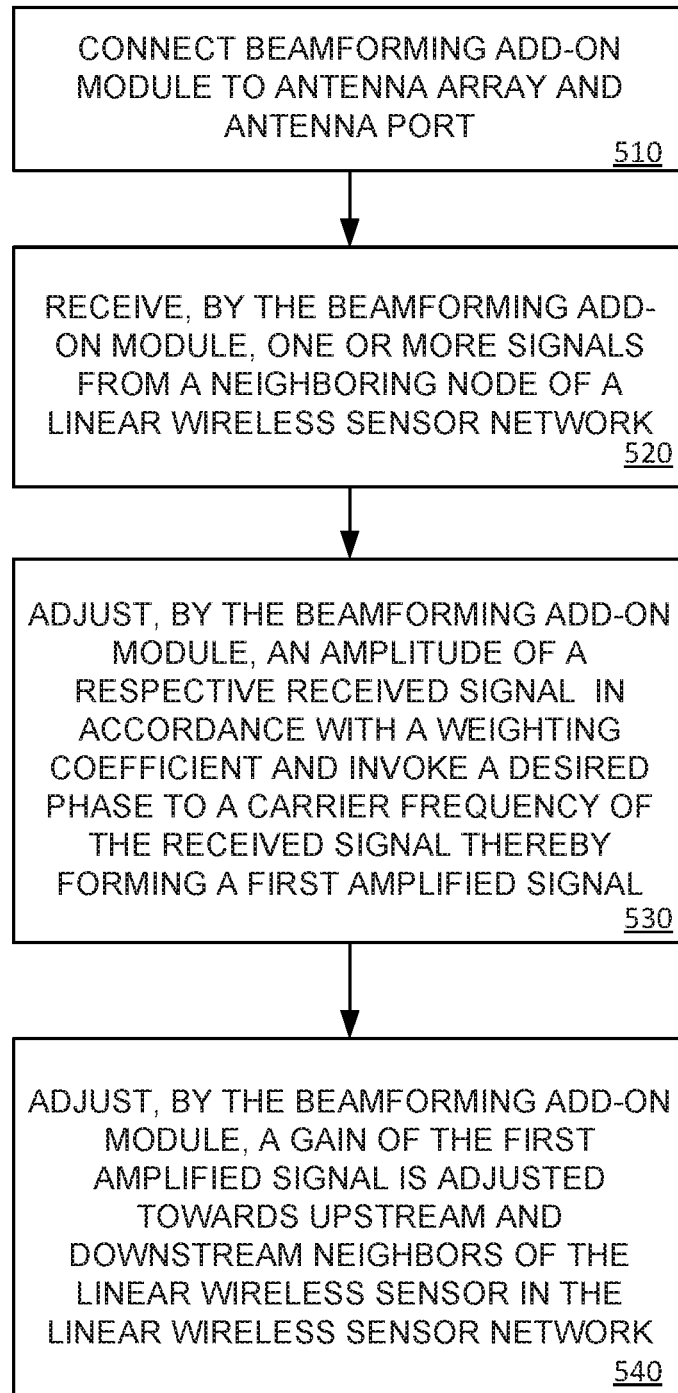


FIG. 5

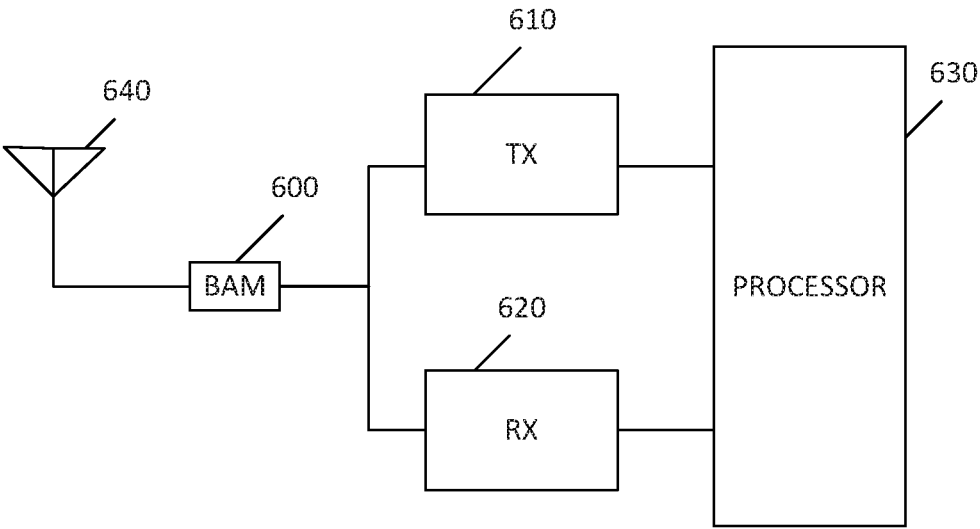


FIG. 6

NON-INVASIVE BEAM FORMING ADD-ON MODULE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to co-pending U.S. provisional application entitled, "Non-Invasive Beamforming Add-On Module," having Ser. No. 62/205,911, filed Aug. 17, 2015, which is entirely incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure is generally related to antenna beamforming within a multihop network.

BACKGROUND

[0003] Mobile multihop networks have been considered lately as viable alternatives for the delivery and sharing of multimedia content between users.

SUMMARY

[0004] Embodiments of the present disclosure provide an apparatus and method for antenna beamforming within a linear wireless sensor network. One such apparatus, among others, comprises input circuitry of a linear wireless sensor network configured to receive one or more signals from a neighboring node of the linear wireless sensor network; first amplifier circuitry configured to adjust an amplitude of a respective received signal in accordance with a weighting coefficient and invoke a desired phase to a carrier frequency of the received signal thereby forming a first amplified signal; and second amplifier circuitry configured to adjust a gain of the first amplified signal towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network.

[0005] In any one or more aspects, the input circuitry couples to one or more directional antennas. The second amplifier circuitry can comprise analog-to-digital circuitry configured to convert the first amplified signal to a digital signal and a mixer circuit element configured to adjust a frequency of the digital signal before passing the digital signal to a field-programmable gate array circuit element for adjusting the gain of the first amplified signal. In such an exemplary apparatus, the first amplifier circuitry and the analog-to-digital circuitry is configured to be disabled during a transmit state, in one embodiment.

[0006] In any one or more aspects, the one or more signals received by the input circuitry comprise a preamble of a data frame. The second amplifier circuitry can be configured to adjust the weighting coefficient of the first amplifier circuitry based on the adjusted gain. In such an exemplary embodiment, the second amplifier circuitry can be configured to perform a linearly constrained minimum variance (LCMV) process to adjust the weighting coefficient.

[0007] In any one or more aspects, the first amplifier circuitry can comprise a splitter circuit element configured to split the first amplified signal into a first split signal and a second split signal, wherein the first split signal is passed to the second amplifier circuitry and the second split signal is passed as an external output. In another embodiment, the first amplifier circuitry can be configured to be disabled during a transmit state.

[0008] One embodiment of a method, among others, includes receiving one or more signals from a neighboring node of a linear wireless sensor network; adjusting an amplitude of a respective received signal in accordance with a weighting coefficient and invoking a desired phase to a carrier frequency of the received signal thereby forming a first amplified signal; and adjusting a gain of the first amplified signal towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network.

[0009] In one embodiment, such a method further comprises converting the first amplified signal to a digital signal; and adjusting a frequency of the digital signal before adjusting the gain of the first amplified signal. In any one or more aspects, the one or more signals can comprise a preamble of a data frame.

[0010] In one embodiment, such a method further comprises adjusting the weighting coefficient based on the adjusted gain. In an exemplary embodiment, the method further comprises performing a linearly constrained minimum variance (LCMV) process to adjust the weighting coefficient. In any one or more aspects, such a method further comprises splitting the first amplified signal into a first split signal and a second split signal, wherein the first split signal is passed to an amplifier circuitry block for adjusting the gain of the first amplified signal and the second split signal is passed as an external output.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Many aspects of the present disclosure can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the present disclosure. Moreover, in the drawings, like reference numerals designate corresponding parts throughout the several views.

[0012] FIG. 1 is a block diagram of a linear wireless sensor network (LWSN) architecture in accordance with an embodiment of the present disclosure.

[0013] FIGS. 2-3 are block diagrams of an embodiment of a beamforming add-on module in accordance with an embodiment of the present disclosure.

[0014] FIG. 4 is a diagram of a radiation pattern of antenna elements of FIG. 1 arranged in a uniform rectangular array (URA) geometry.

[0015] FIG. 5 is a flowchart diagram illustrating an exemplary non-invasive beamforming method in accordance with an embodiment of the present disclosure.

[0016] FIG. 6 is a block diagram of an exemplary embodiment of a node and beamforming add-on module of a LWSN in accordance with an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0017] A multihop network, such as a wireless sensor network, includes a plurality of communication devices. An example is a wireless communication device. In a wireless sensor network, each of the communication devices is also a sensor. The communication device is referred to as a node.

[0018] A linear wireless sensor network (LWSN) refers to the case in which sensors are deployed over a line such that data frames are forwarded in a linear fashion along the chain of sensors. Linear wireless sensor networks are seen in multiple industrial applications such as: wireless seismic

surveys, pipeline monitoring systems, conveyor belts in process facilities; and aluminum smelters, among others. Unlike traditional wireless sensor network applications, real-time monitoring in these applications require linear placement of sensor nodes to detect and report an event of interest to a base station (BS) through gateways (GWs). FIG. 1 illustrates LWSN architecture in accordance with the present disclosure having a series of nodes (n_i) in linear placement with a gateway (GW) that is in communication with a base station (BS).

[0019] Since data frames are routed in a daisy chain fashion, it is quite beneficial if each sensor node can employ a directional antenna. The optimal antenna is one that maximizes gain along the line whether in the upstream or the downstream direction. In other words, it is an antenna whose radiation pattern has two main lobes that are aligned to the linear network topology.

[0020] A challenge with LWSNs is the fact that sensors are deployed manually in the field and thus the process is prone to misalignment. In other words, a sensor with a bi-directional antenna may be deployed with an azimuth offset from the network line. Many have proposed the replacement of single-element directional antennas with phased arrays of omni-directional antennas such that the antenna beam is steered towards the desired direction.

[0021] Indeed this is reasonable only when it does not entail major alteration or adjustment to the existing modem design. Otherwise, equipment manufacturers are refraining from utilizing such solutions due to the high cost associated with an adjusted ASIC (Application-Specific Integrated Circuit) design. Bearing that challenge in mind, embodiments of the present disclosure utilize a non-invasive beamforming add-on module or apparatus. The module couples to an existing antenna port and rectifies the beam azimuth in the upstream and downstream directions and does not entail any change to the existing modem ASIC or RF (Radio Frequency) circuitry. In addition, an exemplary embodiment of the beamforming add-on module maintains a small footprint and is energy-efficient.

[0022] FIG. 2 provides a block diagram of an embodiment of the beamforming add-on module **200** in a receive state. In the figure, four 2 dBi dipole antenna elements **210** are shown. In one embodiment, the maximum array gain in one direction is up to 8 dBi. The antenna elements **210** are arranged according to a uniform rectangular array (URA) geometry.

[0023] Each antenna element is followed by a weighting coefficient circuitry block **220**. The weighting coefficient circuitry block **220** comprises a phased signal amplifier, i.e. amplifies/attenuates the signal received from the antenna array **210** in an input RF stage and invokes a desired phase to the carrier frequency. From the weighting coefficient circuitry block **220**, the signal is split into two parts by a splitter circuitry block **230**. One part of the signal propagates to the rest of the module blocks (beginning with an amplifier circuitry block **260**) and the other part of the signal is received by a combiner/splitter circuit element **240**. The combiner/splitter circuit element **240** combines the signals received from the respective splitter circuitry block elements and outputs a signal to the antenna port **250** on a sensor enclosure. This ensures that frame detection process by a receiving modem (on the existing enclosure) is uninterrupted.

[0024] The received signal from each antenna element PA_i of the amplifier circuitry block **260** is amplified and passed through an ADC_i element of an ADC (Analog-to-Digital Converter) circuitry block **270** and a mixer element of a mixer circuitry block **275** to a FPGA **280** (Field-Programmable Gate Array). The FPGA **280** executes an automatic gain control (AGC) process, as known to one of ordinary skill in the art, to optimize the gains of the amplifiers (PA_i). After adjusting the PA gains, the FPGA **280** receives a down-mixed signal ensemble from the mixer circuitry block **270**. The FPGA **280** performs a beam scanning process on the received signal using a minimum variance distortionless response (MVDR) in order to estimate the angle of arrival of the incoming signal. Then it follows with a linearly constrained minimum variance (LCMV) process. Two objectives for the LCMV process are to maximize the gain towards the upstream and downstream neighbors and minimize the gain along the line perpendicular to the network line. A local oscillator (XCO) circuit element **290** is used with the mixer circuitry block **275** to input a signal at a desired frequency. A power supply (PS) **295** is provided (or made available) to provide a power source to the FPGA **280**, in one embodiment.

[0025] FIG. 3 illustrates the beamforming add-on module **200** while in a transmit state in one embodiment. It is noted that the power amplifiers **260** and analog-to-digital converters **270** are switched off to save energy (as represented by dashed lines in the figure). The FPGA **280** is only partially active. In fact, for an exemplary embodiment, the FPGA **280** disables all functions except for a clocked timer which will periodically wake up the system for recalibration of the antenna weight coefficients.

[0026] FIG. 4 depicts a typical radiation pattern of antenna elements **210** are arranged according to a uniform rectangular array (URA) geometry. In the figure, it can be noted that the offset of a respective node n_i is 30 degrees from the upstream neighbor n_{i-1} in the LWSN. It is further noted that at least four antenna elements are suited for efficient operation of the devised beamforming add-on module **200**, in one embodiment. As shown by the radiation pattern, two elements will not be sufficient to distinguish 360 degrees. Three elements will cover the whole angular range but will not offer sufficient degrees of freedom to control the radiation pattern. Accordingly, four degrees of freedom (and thus four antenna elements) are suited in one embodiment: Two to maximize the gain along the network line and two to null the radiation pattern along the perpendicular line.

[0027] An exemplary beamforming add-on module **200** is configured in a way that makes it agnostic to the underlying network communications protocol. The beamforming add-on module **200** is able to operate on any incoming signal without the need to decode it, in one embodiment. Therefore, an embodiment of beamforming add-on module **200** does not need to distinguish whether the incoming signal is upstream or downstream.

[0028] To further illustrate the operating feature described above, please refer to Table 1 and Table 2 below. In the example in Table 1, it is assumed that the LWSN undergoes a network initialization phase whereby a message is passed along the line from the access point or gateway GW in the downstream direction to all nodes n_i . After the network initiation phase is completed, normal data frame forwarding in the upstream direction starts. An example of the message flow through node n is given in Table 2.

[0029] In one embodiment, the beamforming add-on module 200 performs a mean least squares (MLS) operation to converge to an optimal vector of the weighting coefficients of the weighting coefficient circuitry block 220. The MLS operation is performed so as to generate two weighting vectors, one for the upstream direction and another for the downstream direction. To obtain that for the upstream direction, the MLS operation is performed on results attained from iterations 3 to 6. On the other hand, the downstream vector is attained by performing the MLS operations on iterations 1, 2, 7, and 8.

TABLE 1

network initiation phase			
Iteration at node n	Index	Message	Message Direction
1	$w^{(1)}$	Request-to-send (RTS) message from neighbor n + 1	Downstream
2	$w^{(2)}$	Info/control message from neighbor n + 1	Downstream
3	$w^{(3)}$	clear-to-send (CTS) message from neighbor n - 1	Upstream
4	$w^{(4)}$	Acknowledgment (N/ACK) message from neighbor n - 1	Upstream

TABLE 2

upstream frame forwarding phase			
Iteration at node n	Index	Message	Message Direction
5	$w^{(5)}$	Request-to-send (RTS) message from neighbor n - 1	Upstream
6	$w^{(6)}$	Data frame from neighbor n - 1	Upstream
7	$w^{(7)}$	clear-to-send (CTS) message from neighbor n + 1	Downstream
8	$w^{(8)}$	Acknowledgment (N/ACK) message from neighbor n + 1	Downstream

[0030] As previously mentioned, a challenge with LWSNs is the fact that sensors are deployed manually in the field and thus the process is prone to misalignment. In other words, a sensor with a bi-directional antenna may be deployed with an azimuth offset from the network line. Therefore, wireless sensors are typically equipped with omni-directional antennas although directional antennas are far more preferable. This is due to the fact that they can be exploited to offer better range, higher throughput, and better immunity to interference.

[0031] Specifically, immunity to interference stems from the fact that spectrum bandwidth available is always limited. Consequently, frequency resources are reused repeatedly in the network. Directional antennas, such as employed by embodiments of the present disclosure, indeed help confine the interference footprint of co-channel nodes and therefore results in reducing the overall level of interference. This in

return can be used to increase the throughput attainable by each individual link and therefore increase the network capacity.

[0032] More concretely, an exemplary embodiment of the beamforming add-on module 200 can be used in LWSN in a wireless seismic application to introduce a 30% boost in a wireless seismic network capacity. This can be translated into a 30% higher data production capacity, 30% denser deployment of sensors, or a mixture of both. In other words, the beamforming add-on module 20 pushes the envelope of the seismic system to new boundaries. Further details and information on components of a wireless sensor network architecture in accordance with embodiments of the present disclosure are described in WO/2014/072830 publication, titled "An Improved Channel Assessment Scheme" and WO/2014/076577 publication, titled "An Improved Packet Structure," which are incorporated herein in their entireties.

[0033] Referring now to FIG. 5, a flowchart is depicted illustrating an exemplary non-invasive beamforming method in accordance with an embodiment of the present disclosure. The exemplary method begins with connecting (510) a beamforming add-on module 200 to an antenna array 210 and an antenna port 250 of a node/sensor in a linear wireless sensor network. The method further includes receiving (520) one or more signals from a neighboring node of a linear wireless sensor network. Then, an amplitude of a respective received signal is adjusted (530) in accordance with a weighting coefficient and a desired phase is invoked to a carrier frequency of the received signal thereby forming a first amplified signal. Next, a gain of the first amplified signal is adjusted (540) towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network. Additional actions may also be performed in further embodiments, such as performing a linearly constrained minimum variance (LCMV) process to adjust the weighting coefficient and splitting the first amplified signal into a first split signal and a second split signal, wherein the first split signal is passed to an amplifier circuitry block 260 for adjusting the gain of the first amplified signal and the second split signal is passed as an external output, among others.

[0034] In accordance with the present disclosure, an exemplary beam-forming add-on module or apparatus includes input circuitry of a linear wireless sensor (n_i) configured to receive one or more signals from a neighboring node (n_{i-1} , n_{i+1}) of the linear wireless sensor network; first amplifier circuitry 220 configured to adjust an amplitude of a respective received signal in accordance with a weighting coefficient and invoke a desired phase to a carrier frequency of the received signal thereby forming a first amplified signal; and second amplifier circuitry 260 configured to adjust a gain of the first amplified signal towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network.

[0035] FIG. 6 illustrates an exemplary embodiment of a sensor node (e.g., n_i in FIG. 1) and beamforming add-on module in a LWSN according to an embodiment of the present disclosure for implementing the method illustrated in FIG. 5. The sensor node includes a transmitter 610 and a receiver 620, both operably connected to digital data processing circuitry in the form of a programmable processor 630. The processor 630 controls and coordinates the operations of the transmitter 610 and the receiver 620. The transmitter 610 is adapted to transmit and the receiver is

adapted to receive radio signals via an array of antenna elements **640**. In accordance with the present disclosure, a beamforming add-on module **600** couples to both the antenna port of the sensor node and the antenna array **640** in order to improve upon reception of transmitted signals from neighboring nodes of the LWSN.

[0036] Certain embodiments of the present disclosure can be implemented in hardware, software, firmware, or a combination thereof. If implemented in hardware, embodiments can be implemented with any or a combination of the following technologies, which are all well known in the art: a discrete logic circuit(s) having logic gates for implementing logic functions upon data signals, an application specific integrated circuit (ASIC) having appropriate combinational logic gates, a programmable gate array(s) (PGA), a field programmable gate array (FPGA), etc.

[0037] It should be emphasized that the above-described embodiments of the present disclosure are merely possible examples of implementations, merely set forth for a clear understanding of the principles of the disclosure. Many variations and modifications may be made to the above-described embodiment(s) without departing substantially from the spirit and principles of the disclosure. All such modifications and variations are intended to be included herein within the scope of this disclosure and protected by the following claims.

1. An apparatus comprising:
input circuitry configured to receive one or more signals from a neighboring node of a linear wireless sensor network;
first amplifier circuitry configured to adjust an amplitude of a respective received signal in accordance with a weighting coefficient and invoke a desired phase to a carrier frequency of the received signal thereby forming a first amplified signal; and
second amplifier circuitry configured to adjust a gain of the first amplified signal towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network.
2. The apparatus of claim **1**, wherein the input circuitry couples to one or more directional antennas.
3. The apparatus of claim **1**, wherein the second amplifier circuitry comprises analog-to-digital circuitry configured to convert the first amplified signal to a digital signal and a mixer circuit element configured to adjust a frequency of the digital signal before passing the digital signal to a field-programmable gate array circuit element for adjusting the gain of the first amplified signal.
4. The apparatus of claim **3**, wherein the first amplifier circuitry and the analog-to-digital circuitry is configured to be disabled during a transmit state.
5. The apparatus of claim **1**, wherein the one or more signals received by the input circuitry comprise a preamble of a data frame.
6. The apparatus of claim **1**, wherein the second amplifier circuitry is further configured to adjust the weighting coefficient of the first amplifier circuitry based on the adjusted gain.
7. The apparatus of claim **6**, wherein the second amplifier circuitry is configured to perform a linearly constrained minimum variance (LCMV) process to adjust the weighting coefficient.
8. The apparatus of claim **1**, wherein the first amplifier circuitry comprises a splitter circuit element configured to

split the first amplified signal into a first split signal and a second split signal, wherein the first split signal is passed to the second amplifier circuitry and the second split signal is passed as an external output.

9. The apparatus of claim **1**, wherein the first amplifier circuitry is configured to be disabled during a transmit state.

10. A method comprising:

receiving one or more signals from a neighboring node of a linear wireless sensor network;
adjusting an amplitude of a respective received signal in accordance with a weighting coefficient and invoking a desired phase to a carrier frequency of the received signal thereby forming a first amplified signal; and
adjusting a gain of the first amplified signal towards upstream and downstream neighbors of the linear wireless sensor in the linear wireless sensor network.

11. The method of claim **10**, further comprising:

converting the first amplified signal to a digital signal; and
adjusting a frequency of the digital signal before adjusting the gain of the first amplified signal.

12. The method of claim **10** or claim **11**, wherein the one or more signals comprise a preamble of a data frame.

13. The method of claim **10**, further comprising adjusting the weighting coefficient based on the adjusted gain.

14. The method of claim **13**, further comprising performing a linearly constrained minimum variance (LCMV) process to adjust the weighting coefficient.

15. The method of claim **10**, further comprising splitting the first amplified signal into a first split signal and a second split signal, wherein the first split signal is passed to an amplifier circuitry block for adjusting the gain of the first amplified signal and the second split signal is passed as an external output.

16. A method, comprising:

receiving, from a neighboring node of a linear wireless sensor network, a plurality of signals from a corresponding plurality of antennas;

estimating an angle of arrival of each of the plurality of signals;

adjusting weighting coefficients of a phased signal amplifier based on the estimated angle of arrival;

receiving, from the neighboring node, another plurality of signals from the corresponding plurality of antennas, wherein the another plurality of signals are adjusted by the phased signal amplifier based on the weighting coefficients;

combining the another plurality of signals; and

providing the combined another plurality of signals to an antenna port.

17. The method of claim **16**, wherein the estimation of the angle of arrival of each of the plurality of signals comprises: performing a beam scanning process on the plurality of signals using a minimum variance distortionless response (MVDR).

18. The method of claim **16**, further comprising:

splitting the plurality of signals to provide a first and second plurality of signals;

amplifying the first plurality of signals;

converting the amplified first plurality of signals from analog to digital; and

down-mixing the digital, amplified first plurality of signals.

- 19. The method of claim 18, further comprising:
providing the second plurality of signals to the antenna port.
- 20. The method of claim 16, wherein the adjusted weighting coefficients maximize gain towards upstream and downstream neighboring nodes and minimizes gain along a line perpendicular to a line of the linear wireless sensor network.

* * * * *